


## **D30 SERIES** **Light Duty Concealed EN3 Door Closers**



### STANDARD FEATURES

- **Certification:** UL Listed
- **Spring Power:** Fixed EN3
- **Durability:** 100,000 cycles above
- **Function:** Adjustable Closing speed  
Adjustable Latching speed
- **Installation type:** Concealed with sliding track arm
- **Type:** Embedded
- **Max. Opening:** 120 °
- **Pressure relief valve:** Yes
- **Mechanism:** Rack&Pinion
- **Hand of door:** Non handed
- **Materials of Body:** Die-Cast Aluminum
- **Materials of guide rail and Main Arm:** 6061, Steel
- **Materials of Spring :** 60Si2Mn
- **Backcheck:** NO
- **Hold open:** Yes
- **Delayed Action:** NO
- **Bearing:** Full complement bearings for long durability
- **Application:** Suitable for interior wood, glass door and frames
- **Finish:** Silver, Brown, White,Black, Others upon request.
- **Warranty:** 5 Years
- **Door width:** 45mm wooden door minimum  
40mm sash door minimum
- **Body thickness:** Slim 32mm

## AVAILABLE INSTALLATION TYPE:

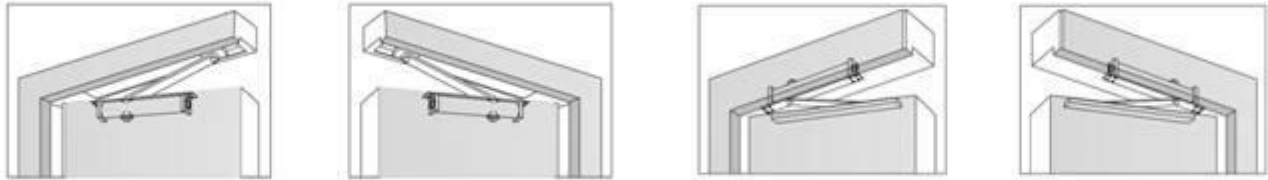

Model #	Spring power	Recommended Door Weight	Recommended Max. Door Leaf Width (mm )	Notes
D30	3#	40-65 KGS	950 mm	Slide track arm

\*Note:Open the door to the desired angle,and then tighten the set screws in the slider combination.If the HO function is not needed,loosen the fixing screws.

## PRODUCT DIMENSIONS:

