


D30S SERIES **Light Duty Concealed EN3 Door Closers**



STANDARD FEATURES

- **Certification:** UL Listed
- **Spring Power:** Fixed EN3
- **Durability:** 100,000 cycles above
- **Function:** Adjustable Closing speed
Adjustable Latching speed
- **Installation type:** Concealed with sliding track arm
- **Type:** Embedded
- **Max. Opening:** 105 °
- **Pressure relief valve:** Yes
- **Mechanism:** Rack&Pinion
- **Hand of door:** Non handed
- **Materials of Body:** Die-Cast Aluminum
- **Materials of guide rail and Main Arm:** 6061, Steel
- **Materials of Spring :** 60Si2Mn
- **Backcheck:** NO
- **Hold open:** Yes
- **Delayed Action:** NO
- **Bearing:** Full complement bearings for long durability
- **Application:** Suitable for interior wood, glass door and frames
- **Finish:** Silver, Brown, White,Black, Others upon request.
- **Warranty:** 5 Years
- **Door width:** 45mm wooden door
40mm sash door

AVAILABLE INSTALLATION TYPE:

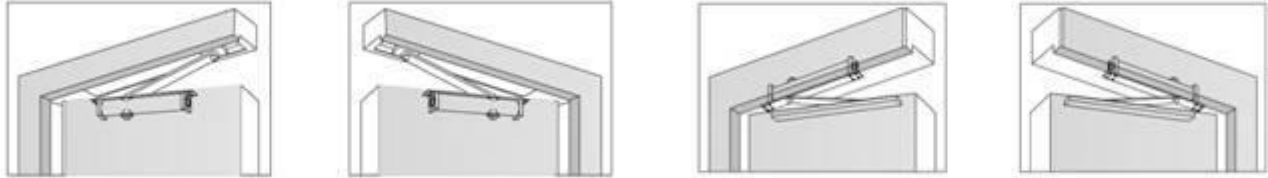

| Model # | Spring power | Recommended Door Weight | Recommended Max. Door Leaf Width (mm) | Notes |
|---------|--------------|-------------------------|--|-----------------|
| D30S | 3# | 40-65 KGS | 950 mm | Slide track arm |

***Note:**

1. The valves on both sides have been adjusted to the proper location by the factory people when ready.
2. The two downward valves should be closed down completely (turning to the end clockwise) before your installing the closer inside the door.

PRODUCT DIMENSIONS:

